


# PATRON 11.0

Dynamic single rope with high safety factor and great durability. Designed for heavy usage in rope training centres, climbing schools and rescue situations.

## DESCRIPTION

Rope has thicker sheath with perfect abrasion resistance.

Suitable for the most types of the belay devices on the market.

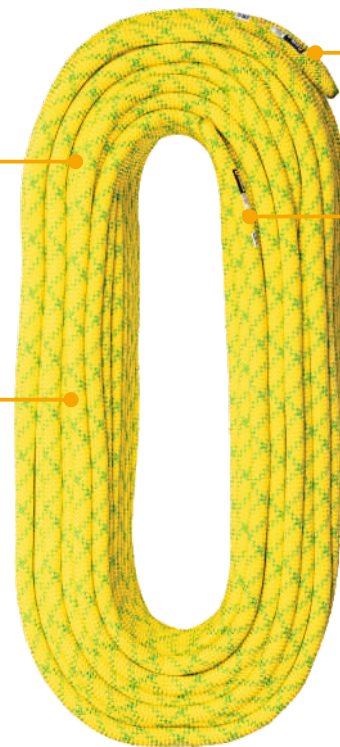

Ultrasonic ending and thermo-transfer end marking.

Middle marking.

## KEY FEATURES

- thicker sheath with perfect abrasion resistance

## LENGTH

pack: 30–80; 100 m  
spool: 200 m

## STANDARDS

CE 1019  
EN 892 UIAA

## FEATURES



11.0 mm




single rope



2 YEARS warranty



## MATERIALS



● 100 % PAD

## TECHNICAL DATA

sheath slippage [%]	0,4
rope diameter [mm]	11,0
number of UIAA falls min	16
max. impact force [kN]	9,1
static elongation [%]	5,3
dynamic elongation [%]	31
weight [g/m]	79

