


High-end climbing single rope with high safety factors and extremely high durability. Suitable for both experienced climbers and beginners.

## **DESCRIPTION**

Ultrasonic ending and thermotransfer end marking.

handling provide easy manipulation in all belay devices.

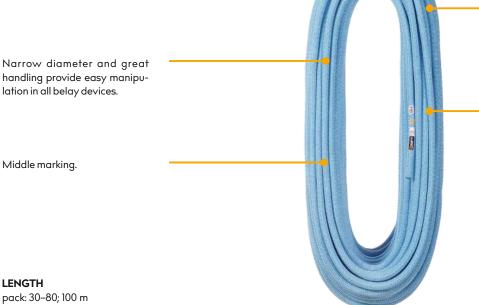

The unique patented InterCore technology provides maximum safety even in case of a damaged sheath.

Thanks to the sandwich-type construction of braided layers and the use of specially developed staple fibres the rope has super high resistence to abrasion.

## **KEY FEATURES**

- Patented InterCore technology
- Low diameter
- High abrasion resistance

## **STANDARDS**

**(€** 1019

spool: 200 m

**EN 892 UIAA** 

## **FEATURES**













InterCore


# **MATERIALS**



100 % PAD

### **TECHNICAL DATA**

sheat slippage [%]	0
rope diameter [mm]	9.7
number of UIAA falls min	5
max. impact force [kN]	7.7
static elongation [%]	9.0
dynamic elongation [%]	30
weight [g/m]	61

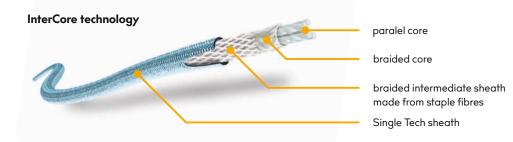



L057 Version: 03/2021

### ROPE PRODUCTION DATE IDENTIFICATION

### Colour of the control yarn within rope's core – this colour marking applies only to SINGING ROCK ropes:

red/green	2013
red/black	2014
green	2015
blue	2016
yellow	2017
black	2018
red/yellow	2019

blue/yellow	2020
green/yellow	2021
black/yellow	2022
red/blue	2023
red/green	2024
red/black	2025
green	2026



#### **ASSOCIATED PRODUCTS**



KATA DRY L0580AA00

WEIGHT 61 g/m

## **MAINTENANCE**

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use.

However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



washing



drying



beware of salt



beware of UV



beware of chemicals



read instruction

## **NOTES**