

ROOF MASTER

You want freedom of movement when working on the roof, and the ROOF MASTER harness with its many features and unique Singing Rock MOTION SYSTEM guarantees it. Its movable attachment point is openable, which makes it easy to connect a chest ascender or detach the shoulder straps. So, you can choose between a full-body and a sit harness, it's up to you.

DESCRIPTION

The red light alloy D-ring as front EN 361 fall arrest point.

Side textile EN 358 loops for work positioning are highlighted with red stitching and designed to prevent accidental catching during work.

Neoprene pocket on the right leg loop is suitable for small items.



Rear EN 361 textile attachment point for fall arrest.

Part of the MOTION SYSTEM is the openable RINGO ring, which forms a movable attachment point, a point for work positioning, allows easy attachment of the CAM CLEAN chest ascender or detachment of the shoulder straps and conversion of the full-body harness into the sit harness.

Ring-shaped leg loops are lightweight, yet very comfortable, their size can be easily adjusted with SPEED buckles, they are connected to the waist belt at the back by adjustable elastic straps.

KEY PROPERTIES

- new and unique Singing Rock MOTION SYSTEM
- new and textile loop for positioning according to EN 358
- textile back attachment point EN 361
- maximum movement point EN 813
- light weight
- a new multi gear loops for attaching the tool bag and other gear
- light and comfortable leg loops

STANDARDS

CE 1019

EN 361

EN 813

EN 358

USAGE



-30 – +50 °C

FEATURES



ROOF Master M/L
1830 g / 64.5 oz




guarantee

MATERIAL COMPOSITION



- 45% PES
- 20% steel
- 12% EVA foam
- 10% PVC
- 8% light alloy
- 5% PAD

SIZE CHART




	S	M/L	XL
A [cm/in]	65-80 / 25-31	75-100 / 29-39	85-130 / 33-51
B [cm/in]	45-60 / 18-24	50-75 / 19-29	50-75 / 19-29
C [cm/ft]	150-170 / 4.92-5.57	160-180 / 5.25-5.9	175-205 / 5.74-6.73



A – waist circumference; B – a circuit leg loops; C – body height

TECHNICAL DATA

- 1 The loops to fix a webbing with a buckle for easy chest ascender fixation.
- 2 Two braided gear loops with a bearing capacity of 5 kg.
- 3 Additional loops with a bearing capacity of 5 kg offer additional space for the gear and better gear orientation.
- 4 Slots on the waist belt designed for a secure connection of expensive equipment (such as power saw, drilling machine), with a bearing capacity 1 kN.
- 5 Material loop for a secure connection of expensive equipment (such as power saw, drilling machine), with a bearing capacity 1 kN.
- 6-10 Strength webbing (6 – waist belt, 7 – leg loops, 8 – connecting strap, 9 – back elastic webbing, 10 – shoulder webbing).
- 11 Moving straps of the MOTION SYSTEM are covered with strong polyester fabric to increase the abrasion resistance.
- 12 Wide anatomic waist belt perfectly fits to user's body, high rigidity with sufficient padding provides comfort in work at height and positioning.
- 13 Inner soft foam padding for additional comfort.
- 14 Identification label.
- 15 Webbing made of polyester with high abrasion resistance.
- 16 The reflective part on the waist belt for higher visibility in dark conditions.
- 17 Rear strap for adjusting shoulder height.
- 18 Name tag at the back shoulder part.
- 19 Front connection point for and descending according to EN 813. Openable "RINGO" ring made of light alloy, load capacity 20 kN.
- 20 Chest connection point EN 361. Aluminum D-ring with a load capacity of 15 kN.
- 21 Rear EN 361 fall arrest point. Textile loop with a load capacity of 15 kN. Textile loop is flat and situated on the padding, "A" marked.
- 22 Speed buckles on the waist belt and leg loops allow smooth and quick adjustment in the best time and with maximum comfort.
- 23 Multi-gear loop for fastening the tool bag and other material.
- 24 Double buckles for adjusting elastic strap.
- 25 Small pocket on the right leg loop is suitable for small items.

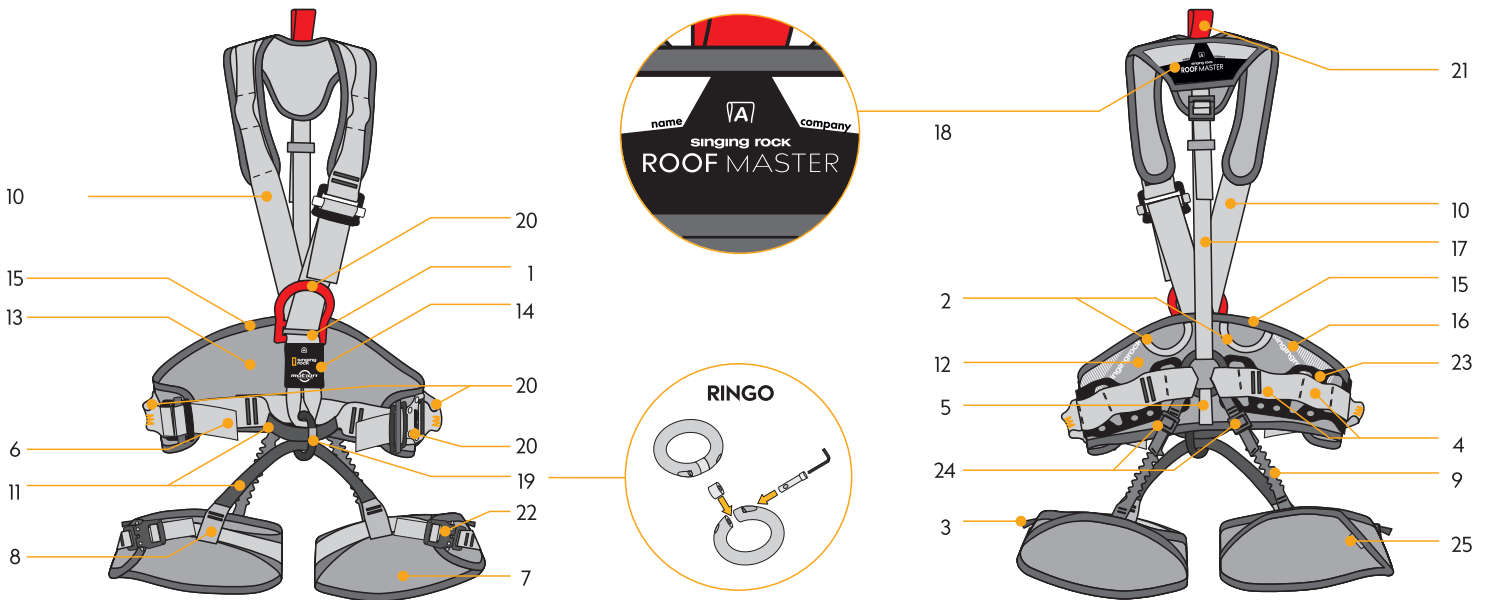

MOTION SYSTEM

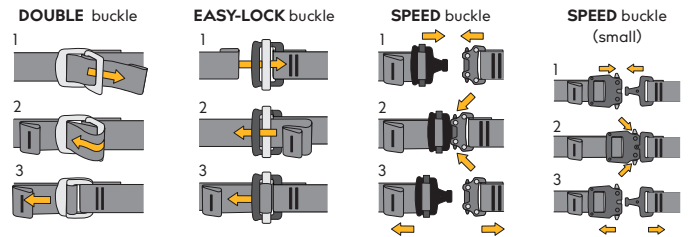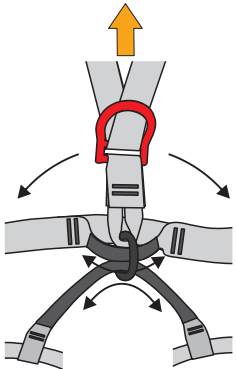

MAINTENANCE

Lifetime of this product depends on the frequency and the environment (salt, sand, moisture, chemicals, etc.) in which is used. Without taking wear or mechanical damage into account and in compliance with the conditions specified in the instructions for use this product may be used 15 years from the date of production and 10 years from the date of the first use. However mechanical damage can occur during the first use, which can limit the lifetime of this products only to its first use.



