

BANTAM BEAMER

X0075XX14

Removable Beam Anchor Device
Suitabel for construction and industrial fields, mining and climbing
as well.

CE 0321

Anchor BANTAM BEAMER



EN 795:2012 Class B
ANSI Z359.1:2007
ANSI Z359.7:2011
OSHA 1910.66/1926.502

Directive / směrnice
PSA 89/686/EEC
Nař. vlády 21/2003 Sb.

Certified by / certifikoval
EC QMS of production inspected by /
ES SJ výroby prověřuje
SATRA Technology Centre, Kettering,
Northamptonshire, UK, Nn16 8SD



Reading and understanding instruction
for use are required to use this product!
Bez důkladného pročetí a pochopení návodu
k použití nepoužívejte tento výrobek



3 years guarantee
3 roky záruka

Technical description:

- tested to meet ANSI Z359.1, ANSI Z359.7,
OSHA 1910.66/1926.502 and EN 795
- lighter, smoother and easier to use
- 360° swivel D-Ring connections
- bar and paws made from Aluminum Alloy for
a high-strength and light weight design
- only for one worker
- breaking Strength of 5,000 lbs (22kN)
- dual side trigger activation for easy use
- can be used at both overhead and foot level heights

materials




Cross bar / příčka:
7075 T-6 Aluminum Alloy
D-ring bracket / držák D-kroužku:
stainless steel
Clamps / svorky:
6061 T-6 Aluminum Alloy
D-ring / D-kruh:
zinc plated steel
Spring / pružina:
zinc plated steel
Flange insert / příruba:
bronze



Váha
Weight



Pevnost
Strength

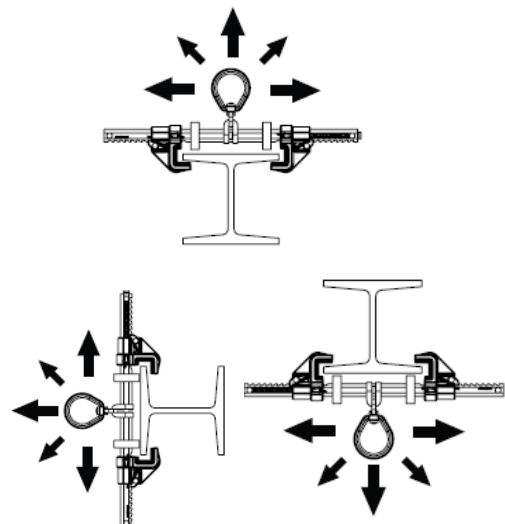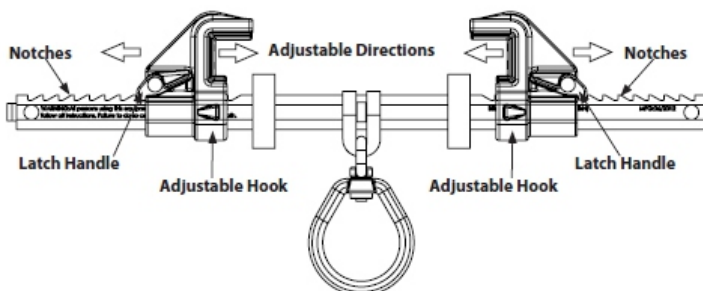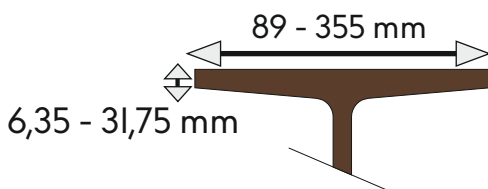

singing rock

SAFETY
FIRST

